




Front End Loader Axles



■ Brakes ■ Axles ■ Aftermarket ■ Bus and Coach ■ Off-Highway ■ Trailer products

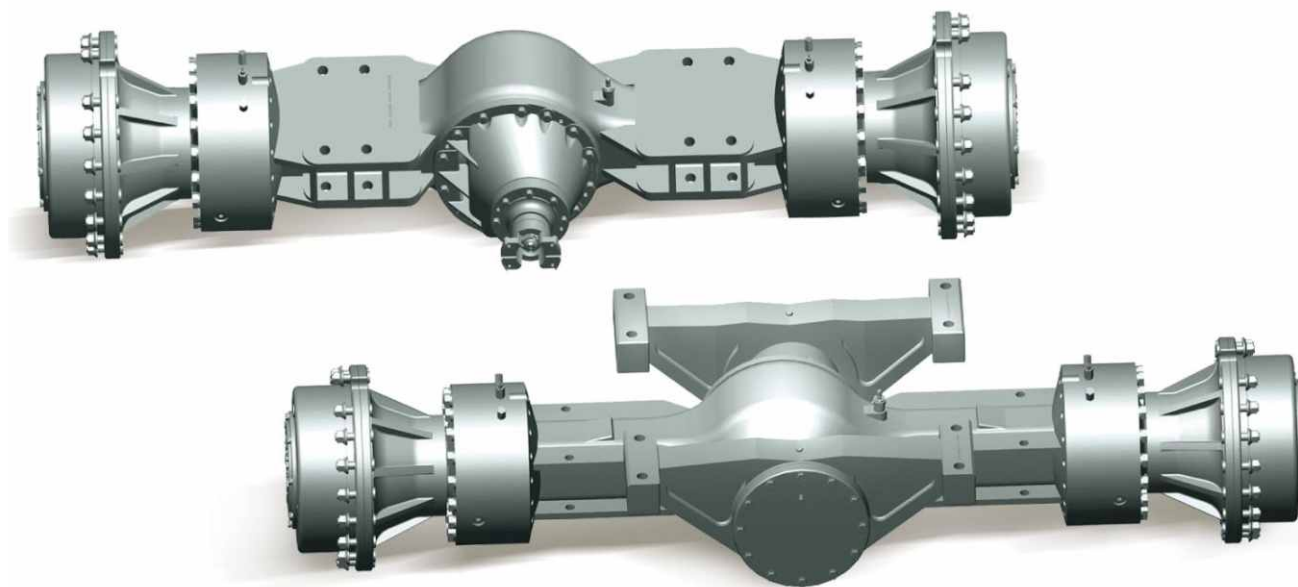

Front End Loader Axles

Performance Advantages:

- Articulated trunnion mount for increased mobility
- High-capacity differentials for superior durability
- Needle roller bearings to accommodate severe-duty loads and provide longer life
- Comes equipped with wet Disc brakes delivering unprecedented durability and minimal maintenance requirement

RATED AXLE LOAD (Kg)	MAX. I/P TORQUE (N.m)	TOTAL RATIO	CARRIER RATIO	WHEEL RATIO	BRAKE TORQUE / AXLE (N.m)	MOUNT CENTER (mm)	FLANGE - FLANGE (mm)	TRACK (mm)	OVERALL LENGTH	RIM SIZE (inches)	RIM MOUNT DIA (mm)
20000	6150	24.08	4.875	4.94	60000	878 - 1050	2455	2250	2861	25	488

All the specifications shown are indicative, for actual application approval please contact MHVSIL Engineering Group

Meritor HVS (India) Limited

Hootagalli Industrial Area, Mysore - 570 018, Karnataka, India.
Tel : +91 821 2403235 | Fax : +91 821 2403234 | Web : www.mhvsil.com